

# Cooling/Heating Units

DX AIR COOLED



EBO16 Cooling Unit Shown

## Type O EBO and EHBO Models

EBO and EHBO are draw-through, ductable cooling units with a rotatable, variable speed blower and an integral condensate pan. They are typically installed low in a closet, cabinet, or other enclosed space, with discharge air ducted to one or more grills high in the room.

Models are available in capacities from 4,000 to 16,000 Btu/hr, and are used with Cruisair ACA or ACH remote condensing units. Multiple cooling units can be used with a single condensing unit of matched capacity.

The condensate pan and blower housing are covered with insulating foam, reducing noise and secondary condensation. The condensate pan has an anti-slosh, antifungal foam lining. The squirrel cage blower can be rotated so the discharge air is easily ducted.

EHBO models have an electric heat element, which can supply heat when outside temperatures are too cold for reverse cycle heat. The unit has two-stage overhear protection, one auto-reset and the second a manual reset. The interior is also lined with high temperature insulation.

Cruisair cooling units can be used with an SMX Series computerized control, or a rotary-knob switch assembly. Models with electric heat must use SMX Online or the appropriate aux. heat switch assembly.

EBO and EHBO units can be installed with a combination of plenums and flexible duct, or built-in ductwork to convey discharge air to one or more outlet grills. When using built-in ducts, a flexible transition between the blower and duct should be installed.


## Mounting Frames

The unit must be mounted with one of the optional mounting feet or frames, to provide vibration isolation. Support must be provided for the blower/motor assembly.

## Features

- Compact ductable cooling unit
- Rotatable, variable speed blower
- Works with Cruisair ACA/ACH condensing units
- EHBO models with integrated electric heat
- Insulated condensate drain pan with anti-slosh, antifungal foam lining
- Foam insulated metal surfaces
- Air filter included

**Cruisair**<sup>®</sup>  
Chill Out In Style

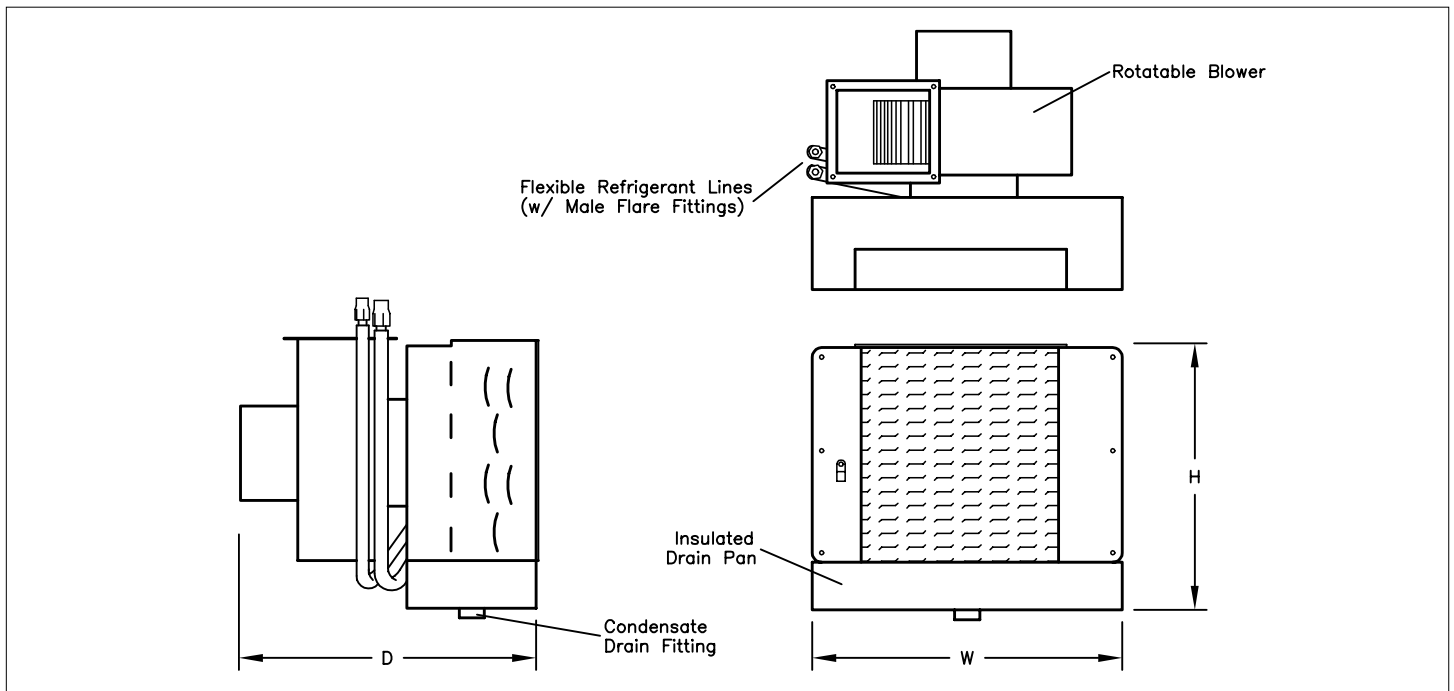


### TECHNICAL SPECIFICATIONS

Model	Capacity (Btu/hr)	Voltage	Amps	Electric Heater		Dimensions (in/mm)			Air Flow (cfm/cm <sup>h</sup> )	Weight (lb/kg)																																																																																																																					
				kW	Amps	H	W	D																																																																																																																							
EB04	4,000	115	1.9	-	-	9.5/240	12.5/320	13.0/330	165/280	14/6.4																																																																																																																					
EB04C		230	0.9	-	-						EB07	7,000	115	1.9	-	-	10.0/255	12.0/305	14.0/355	270/460	14/6.4	EB07C	230	0.9	-	-	EBO7/10	7,000	115	2.9	-	-	10.0/255	12.0/305	14.0/355	300/510	16/7.3	EBO7/10C	230	1.5	-	-	EBO10	10,000	115	2.9	-	-	11.5/290	13.5/345	14.8/375	330/560	21/9.5	EBO10C	230	1.5	-	-	EBO14U	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16C	230	1.6	-	-	EHBO7	7,000	115	1.9	1.0	8.4	10.0/255	11.3/287	16.6/421	270/460	16/7.3	EHBO7C	230	.9	1.0	4.2	EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4	EHBO10C	230	1.5	1.5	6.2	EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900
EB07	7,000	115	1.9	-	-	10.0/255	12.0/305	14.0/355	270/460	14/6.4																																																																																																																					
EB07C		230	0.9	-	-						EBO7/10	7,000	115	2.9	-	-	10.0/255	12.0/305	14.0/355	300/510	16/7.3	EBO7/10C	230	1.5	-	-	EBO10	10,000	115	2.9	-	-	11.5/290	13.5/345	14.8/375	330/560	21/9.5	EBO10C	230	1.5	-	-	EBO14U	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16C	230	1.6	-	-	EHBO7	7,000	115	1.9	1.0	8.4	10.0/255	11.3/287	16.6/421	270/460	16/7.3	EHBO7C	230	.9	1.0	4.2	EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4	EHBO10C	230	1.5	1.5	6.2	EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132	EHBO16C	230	1.6	2.0	8.3										
EBO7/10	7,000	115	2.9	-	-	10.0/255	12.0/305	14.0/355	300/510	16/7.3																																																																																																																					
EBO7/10C		230	1.5	-	-						EBO10	10,000	115	2.9	-	-	11.5/290	13.5/345	14.8/375	330/560	21/9.5	EBO10C	230	1.5	-	-	EBO14U	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16C	230	1.6	-	-	EHBO7	7,000	115	1.9	1.0	8.4	10.0/255	11.3/287	16.6/421	270/460	16/7.3	EHBO7C	230	.9	1.0	4.2	EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4	EHBO10C	230	1.5	1.5	6.2	EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132	EHBO16C	230	1.6	2.0	8.3																										
EBO10	10,000	115	2.9	-	-	11.5/290	13.5/345	14.8/375	330/560	21/9.5																																																																																																																					
EBO10C		230	1.5	-	-						EBO14U	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8	EBO16C	230	1.6	-	-	EHBO7	7,000	115	1.9	1.0	8.4	10.0/255	11.3/287	16.6/421	270/460	16/7.3	EHBO7C	230	.9	1.0	4.2	EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4	EHBO10C	230	1.5	1.5	6.2	EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132	EHBO16C	230	1.6	2.0	8.3																																										
EBO14U	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8																																																																																																																					
EBO16	14,000	115	3.3	-	-	13.0/330	15.5/395	18.0/455	530/900	26/11.8																																																																																																																					
EBO16C		230	1.6	-	-						EHBO7	7,000	115	1.9	1.0	8.4	10.0/255	11.3/287	16.6/421	270/460	16/7.3	EHBO7C	230	.9	1.0	4.2	EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4	EHBO10C	230	1.5	1.5	6.2	EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132	EHBO16C	230	1.6	2.0	8.3																																																																					
EHBO7	7,000	115	1.9	1.0	8.4	10.0/255	11.3/287	16.6/421	270/460	16/7.3																																																																																																																					
EHBO7C		230	.9	1.0	4.2						EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4	EHBO10C	230	1.5	1.5	6.2	EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132	EHBO16C	230	1.6	2.0	8.3																																																																																					
EHBO10	10,000	115	2.9	1.5	12.4	12.0/305	12.5/320	16.8/427	330/560	23/10.4																																																																																																																					
EHBO10C		230	1.5	1.5	6.2						EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132	EHBO16C	230	1.6	2.0	8.3																																																																																																					
EHBO16	14,000	115	3.3	2.0	18.0	12.5/320	18.0/455	20.6/523	530/900	29/132																																																																																																																					
EHBO16C		230	1.6	2.0	8.3																																																																																																																										

### RECOMMENDED DUCT & MIN. GRILL SIZES

Btu/hr	Return Air (sq in/cm)	Discharge Air (sq in/cm)	Recommended Duct Size (in/mm)
4,000	60/390	30/195	4/100
7,000	80/520	50/325	5/125
10,000	100/650	60/390	6/150
14,000	144/936	80/520	7/175
16,000	144/936	80/520	7/175

### INTERPRETING MODEL NUMBERS

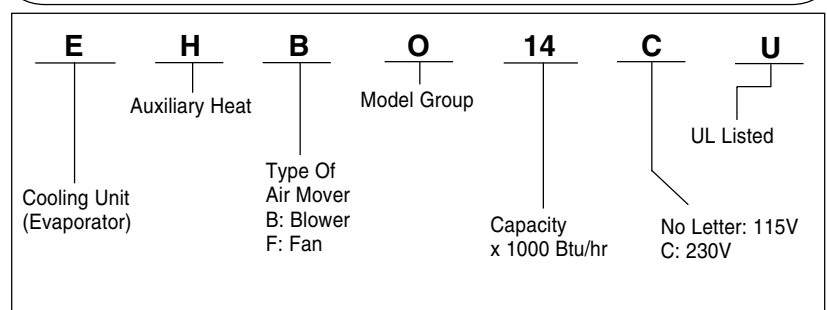

**Taylor Made**  
ENVIRONMENTAL™

P.O. Box 15299 • Richmond, VA 23227-0699 USA • 804-746-1313 • Facsimile: 804-746-7248 • sales@tmenviro-va.com • www.tmenviro.com  
 2000 N. Andrews Ave. Ext. • Pompano Beach, FL 33069-1497 USA • 954-973-2477 • Facsimile: 954-979-4414 • sales@tmenviro-fl.com  
 Fleets Industrial Estate • 26 Willis Way • Poole, Dorset BH15 3SU, England • +44(0)870 3306101 • Facsimile: +44(0)870 3306102 • sales@tmenviro-eu.com  
 ©Taylor Made is a registered trademark of Nelson A. Taylor Co., Inc.; the Taylor Made Group logo is a trademark of Taylor Made Group, Inc.; the Cruisair logo is a registered trademark and the Taylor Made Environmental logo is a trademark of Taylor Made Environmental, Inc.

A Member of  
**THE TAYLOR MADE GROUP**

Revised: 08-28-01 L-0250